
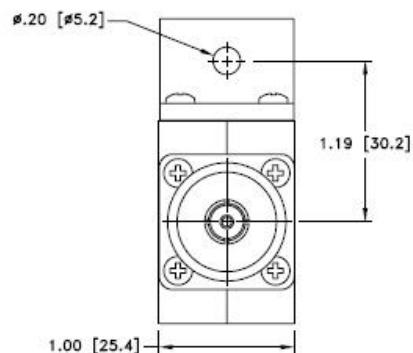
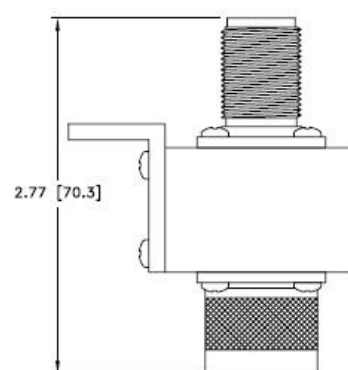
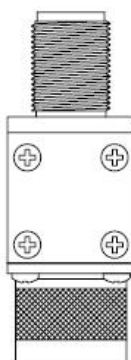


BROADBAND DC BLOCKED PROTECTOR

Broadband DC Blocked Protector for general radio use

- Multi-strike Capability
- Low Strike Throughput Energy
- Flange Mount and Bulkhead Mount Option

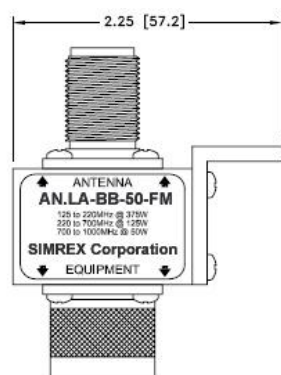

Technical Specifications:

Insertion Loss:	≤ 0.1dB
Freq. Range:	125-1000MHz
Mounting:	Bulkhead
Protected Side Connector:	N Male 50Ω
RF Power:	50-375 Watts
Surge Side Connector:	N Female 50Ω
Throughput Energy:	≤ 220μJ for 3kA @ 8/20μs Waveform
Throughput Voltage:	≤ 700 Vpk
Turn-On Voltage:	+/- 600 Volts
Unit Impedance:	50Ω
Voltage Standing Wave Ratio:	1.1 : 1
Relative Humidity:	90% at 40C
Temperature:	-55 C to +50/85 C Operating/Storage
Vibration:	1G at 5Hz to 100Hz