

SIMREX Corporation

DataMover™ Preempt

902-928 MHz
2.406 - 2.482 GHz
Frequency Hopping
Spread Spectrum
I/O Control
Transceiver

WIRELESS remote preempt CONTROL



PREEMPTION FEATURES

- Up to 4 routes selectively preempted from a single control point.
- Sub-second response time.
- Selectable, failsafe state on all outputs.
- Link valid indicator from each intersection.
- Preempt acknowledge from each intersection.
- Electrical isolation between intersection and firehall.
- Intersections may act as repeaters.

RADIO FEATURES

- License-free long range 900 MHz or 2.4GHz radio.
- High Speed. Application throughput to 115.2 Kbps.
- Unparalleled Robustness
 - Forward error correction
 - CRC/ARQ, multiple re-sends improve performance in poor RF conditions.
- Repeater mode - with self healing networks.
- Network wide diagnostics - Central network control without the need to visit sites

SIMREX..Global wireless solutions. Unlicensed Wireless Data

For more than 2 decades, SIMREX Corporation's wireless products have been providing wireless networking solutions for demanding applications in SCADA, telemetry, telecommunications, mobile data and online transaction markets. SIMREX Corporation provides licensed and unlicensed wireless products and solutions worldwide.

Application Overview

SIMREX is pleased to introduce the DataMover Preempt as a general purpose radio preemption system for fixed control locations. The DataMover Preempt is best suited for applications where wired switches are inconvenient and/or cost prohibitive. There can be protracted delays in getting right of way for buried or overhead wiring to the traffic controller. The DataMover Preempt can be deployed quickly with most installations taking less than a day.

Variants are available with the capability to control from 1 to 4 remote intersections.

Product Overview

The Simrex DataMover Preempt is built around a high performance microcontroller that has 16 bits of digital IO and serial ports that may be used for programming and user applications. The wireless element of the DataMover Preempt utilizes FHSS (Frequency Hopping Spread Spectrum) in the unlicensed ISM Band of 902-928 MHz or 2.406-2.482 GHz to provide reliable long range data transportation at up to 115.2 Kbps. The DataMover SS radio can also be used as a standalone repeater for Datamover Preempt systems. This allows store and forward data operation to extend the operation range of the network.

The DataMover Preempt is available as a prebuilt and prewired solution enclosed in a NEMA enclosure. Additionally, variants of the control box are available with built in antennas to further simplify installation in situations where the RF path is not difficult.

Why Consider a DataMover Preempt Solution?

- Rapid deployment.
- Supervised data link with status indicator.
- High system performance and data integrity. Robust construction, digital signal processing [DSP] technology with self-equalization, automatic CRC/ARQ and powerful forward error correction.
- Flexibility and rapid installation. Low cost deployment due to plug-and-play installation.
- Performance under the most adverse conditions. Robust design provides excellent performance in the face of interference or difficult signal paths.

Applications

- Traffic Control for Emergency Vehicles.
- Firehouse

DataMover™ Preempt Spread Spectrum Radio Specifications

Frequency Band 902-928 MHz ISM band
2.406-2.482 GHz ISM band

Band Segmentation for Friendly
Coexistence with Other Services such as
LMS

Physical and Environmental

Dimensions:

(radio for traffic controller) (4.1 D x 4.4 W x 2.1 H inches)
(10.4 D x 11.2 W x 5.3 H cm)
(NEMA enclosure) (12.0 W x 14.0 H x 7.0 D inches)
(30.5 W x 35.6 H x 17.8 D cm)

Input Power 12 Vdc
Temperature Range -37 to +70 degrees C
Humidity < 95% RH (Non-condensing)

Transmitter

Power Output (user selectable) SS-900: .1 to 1 watt
(20dBm - 30dBm)
SS-2.4: .1 to .5 watt
(20dBm to 27dBm)

Receiver

Sensitivity -108 dBm (1 x 10⁻⁶ BER) typical
Error Detection CRC16; Resend on Error
Interference Avoidance More than 60,000 hop patterns selected
automatically automatically via network
address
FEC, CRC/ARQ and/or Multiple Packet
Transmits
Excellent Strong Signal (interference)
Characteristics

Data

Interface Four RS-232 (one shared with radio,
one for flash programming, one for
configuration, one spare)
16 digital IO (8 in, 8 out)
Usable Throughput 115.2 kbps
Port Speeds 1.2 to 115.2 kbps

Connectors


Power, User, NMS 2 Pin Phoenix
User (4) RS232 (RJ11)
NMS RS232 (RJ11)
RF TNC
Digital I/O 16 pin Phoenix

Network Management

Diagnostics
Centralized network control eliminates
site visits
Create store-and-forward configurations
Compatible with other Simrex products

Agency Approvals

FCC Part 15 Approved
IC Approved

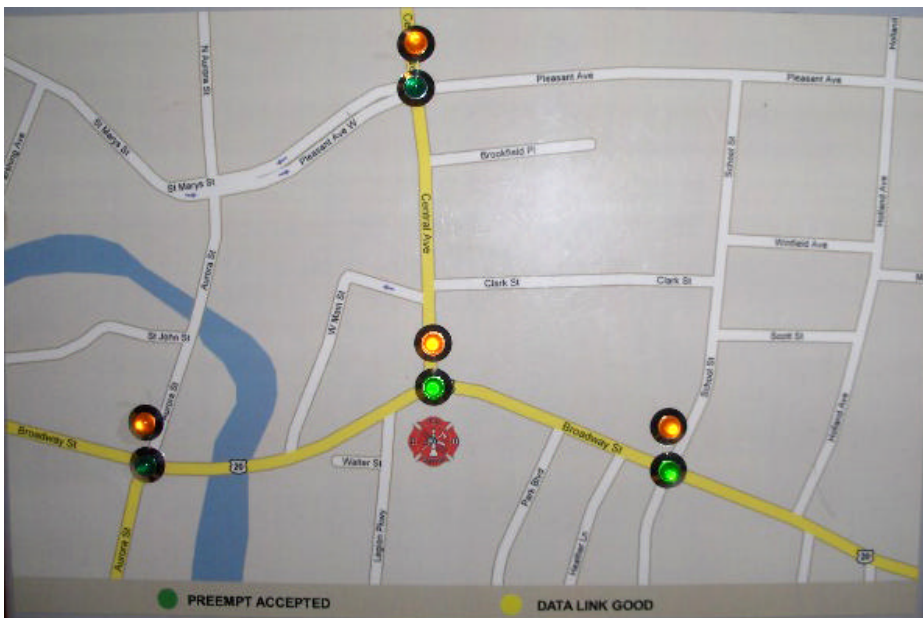

SIMREX CORPORATION

SALES & ENGINEERING

GILBERT, ARIZONA 85234 USA
PHONE (480) 926-6069
FAX (305) 675-7794

WWW.SIMREX.COM

MANUFACTURING & SERVICE

1223 WILLIAM ST.
BUFFALO, NEW YORK 14206 USA
PHONE (716) 206-0174
FAX (716) 852-1223

SIMREX DataMover products are manufactured under a quality system certified to ISO 9001. SIMREX reserves the right to make changes to specifications of products described in this data sheet at any time without notice and without obligation to notify any person of such changes.
© 2004 SIMREX Corporation